


SSR 2"- 4" (50.8mm - 101.6mm) Series

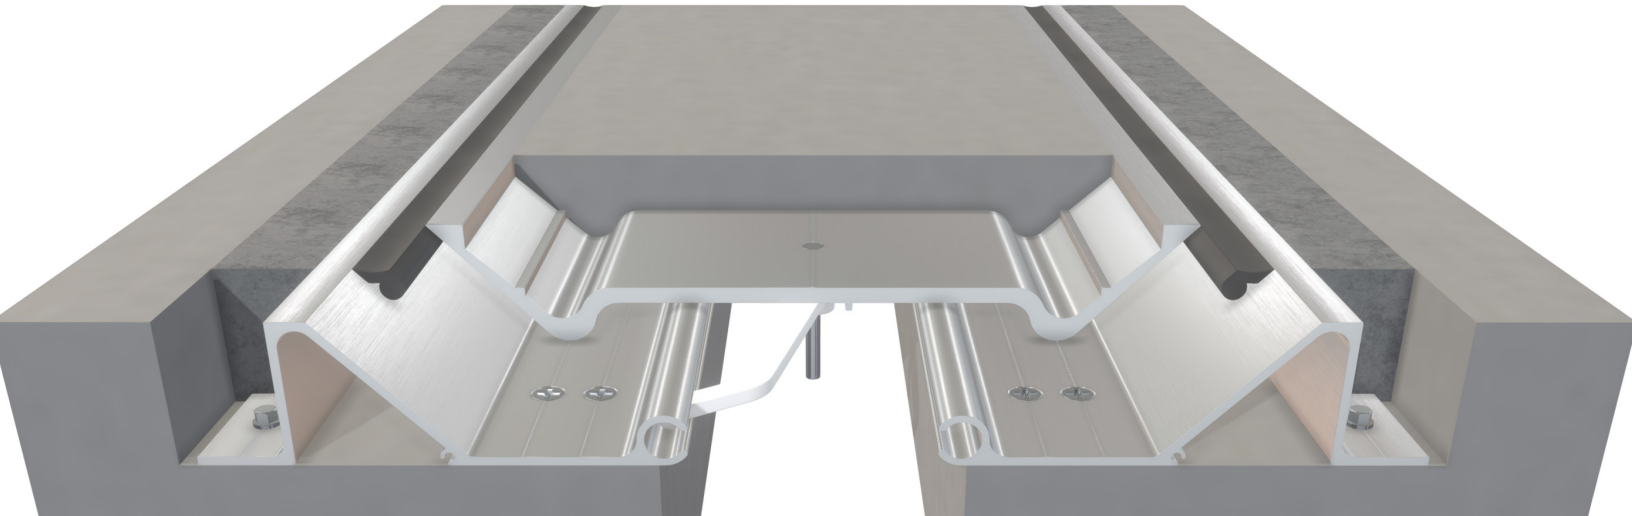

Model SSR-400

This pan-style floor cover is designed for interior and exterior applications where seismic movement occurs. The side caulk joints expand and contract during thermal movement, and during a seismic event the centre pan assembly lifts up as needed and returns to nominal position after the event. The unique system offers a minimal sightline due to the centre pan's ability to accept a variety of floor finishes.

Advantages

- Centre pan accepts a variety of flooring up to 1" thick
- Self-centreing system
- Accommodates a variety of movement requirements, including vertical
- Accommodates a variety of loading requirements
- Highly customisable system
- Vapour & Fire Barrier optional



[View 3D Model](#) →

SSR 2" - 4" (50.8mm - 101.6mm) Series

Product Details

- Joint sizes range from 2" to 4" (50.8mm to 101.6mm)
- 10' (304.8cm) stock lengths
- Injection molded turnbar
- Standard loading up to 227kg
- Meets ASTM E1399



Standard Finish





See all finish options online at c-sgroup.com.au.

Warranty

- Standard Five-Year Warranty

Model Details



MODEL	FLOOR TO FLOOR	FLOOR TO WALL	HINGED
SSR	•		
SSRW		•	
SSRH			•



Learn More →