

# PDA & PDAW

## TECHNICAL DATA:

### Aluminum

- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221

### Primary Seal


- Single Durometer – 78 Shore A
- Available in Black

### Standard Loading

- 500 lbs.

### Wing Seal

- Material – Uncured Neoprene Flashing
- Durometer – 65 Shore A
- Color Black
- Frame heights available in 2' - 5"

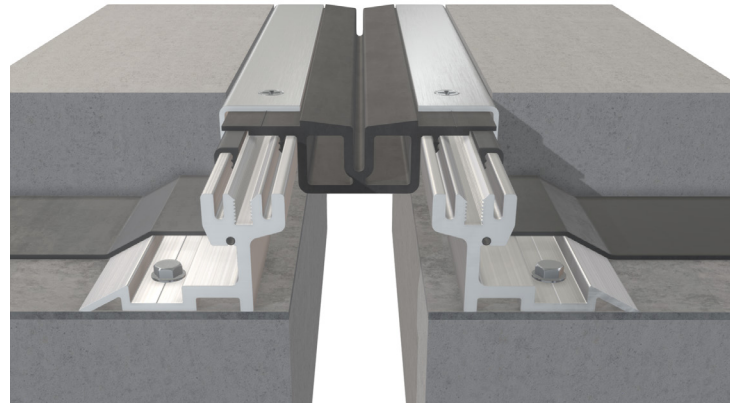

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
PDA-100	1.00" (25mm)	0.00" (0mm)	2.25" (57mm)	4.75" (121mm)	N/A	VARIES
PDA-200	2.00" (51mm)	0.75" (19mm)	3.25" (83mm)	4.75" (121mm)	N/A	VARIES
PDA-300	3.00" (76mm)	1.75" (44mm)	4.25" (108mm)	4.75" (121mm)	N/A	VARIES
PDA-400	4.00" (102mm)	1.50" (38mm)	6.50" (165mm)	6.75" (171mm)	N/A	VARIES
PDAW-100	1.00" (25mm)	0.00" (0mm)	2.25" (57mm)	3.38" (86mm)	N/A	VARIES
PDAW-200	2.00" (51mm)	0.75" (19mm)	3.25" (83mm)	3.38" (86mm)	N/A	VARIES
PDAW-300	3.00" (76mm)	0.50" (13mm)	5.50" (140mm)	3.38" (86mm)	N/A	VARIES
PDAW-400	4.00" (102mm)	1.50" (38mm)	6.50" (165mm)	5.38" (137mm)	N/A	VARIES

