


CHANNEL GUARD: FINISH: _____ THICKNESS: _____ TYPE: _____ CHANNEL GUARDS SUPPLIED IN STANDARD .063" THICKNESS, TYPE 5005 H34 ALLOY WITH CLEAR ANODIZE. OPTIONAL .080" THICKNESS AND TYPE 5005 H34 ALLOY WITH MILL FINISH ARE ALSO AVAILABLE. PLEASE ADVISE IF AN OPTIONAL THICKNESS OR FINISH IS REQUIRED. OPTIONAL POWDER COAT FINISHES ARE AVAILABLE. PLEASE ADVISE OPTIONAL POWDER COAT FINISH IF REQUIRED.	UNITS REQ'D	UNIT HEIGHT	ANGLE	LEG LEN.	NOSE RAD.	WALL WIDTH


NOTES:

1. CHANNEL GUARDS ARE SHIPPED WITH A PROTECTIVE STRIPPABLE COATING.
2. CHANNEL GUARDS HAVE A STANDARD ANGLE OF 90°, LEG LENGTH OF 3 1/2" [89.0mm] AND A STANDARD NOSE RADIUS OF 3/16" [4.8mm], PLEASE ADVISE IF A DIFFERENT ANGLE, LEG LENGTH OR NOSE RADIUS IS DESIRED.
3. CHANNEL GUARDS HAVE A MINIMUM LEG LENGTH OF 2" [50.8mm], A MINIMUM FINISHED WALL WIDTH OF 4-7/8" [123.8mm], AND MINIMUM NOSE RADIUS OF 3/16" [4.8mm].
4. ANGLES ONLY AVAILABLE BETWEEN 45° - 178°.
5. *CHANNEL GUARDS CAN BE USED AT FULL OR PARTIAL HEIGHTS. PLEASE ADVISE SPECIFIED UNIT HEIGHT OF CHANNEL GUARD.*
6. FASTENERS ARE LOCATED 3" FROM TOP, 2-1/2" FROM BOTTOM ON 1 LEG AND 2-1/2" FROM TOP, 3" FROM BOTTOM ON OPPOSITE LEG. IF MORE THAN 2 FASTENERS ARE REQUIRED, FASTENERS WILL BE EQUALLY SPACED AT MAX 16" ON CENTER.

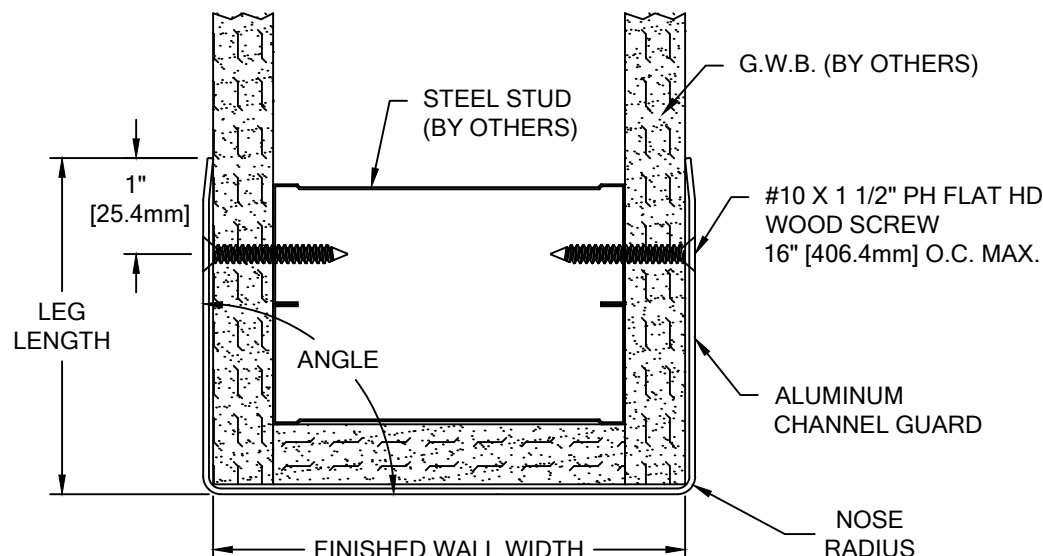

ASCO-8 SERIES CORNER GUARD WITH FASTENERS

WALL CONDITION	SPECIFIED FASTENER	DRILL DIAMETERS		CS PART NUMBER
		WALL	RETAINER	
CONCRETE/CONCRETE BLOCK	#10 X 1 1/2" S/S PHILLIPS FLAT HEAD WOOD SCREW AF-8 PLASTIC ANCHORS	1/4"	N/A	90H009002 90H049004
STEEL STUD/GYPSUM WALL	#10 X 1 1/2" S/S PHILLIPS FLAT HEAD WOOD SCREW	1/8"	N/A	90H009002
WOOD STUD/GYPSUM WALL	#10 X 1 1/2" S/S PHILLIPS FLAT HEAD WOOD SCREW	N/A	N/A	90H009002

 Construction Specialties Hughesville, PA 800.233.8493 570.546.5941 Mississauga, ON 888.895.8955 905.274.3611 www.c-sgroup.com © Copyright 2022 Construction Specialties, Inc.	PROJECT:		REVISION:
	JOB NO.:		F&F:
	CUSTOMER:		
	REP:		DATE:
	DRAWN BY:		SHEET NO: