




TYP SPLICE & BLADE SPACING DETAIL  
 RF-20

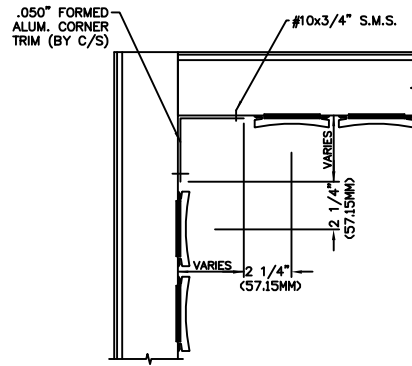


TYP. INSIDE CORNER DETAIL  
 RF-20

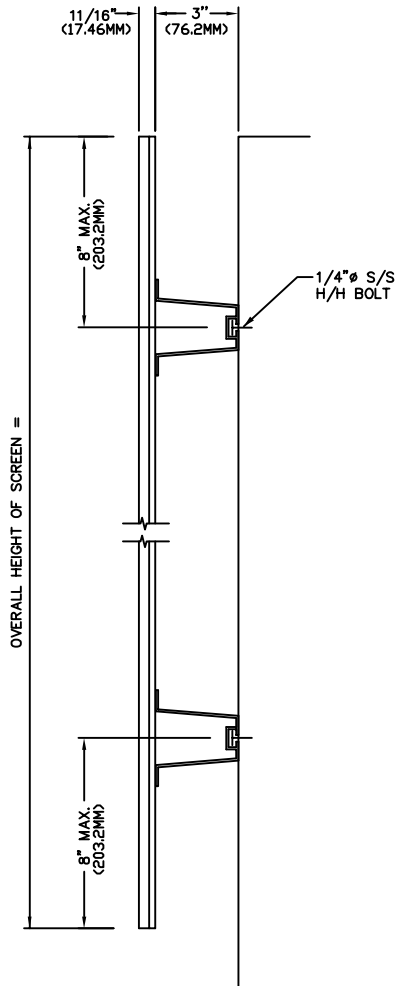

VERTICAL SECTION

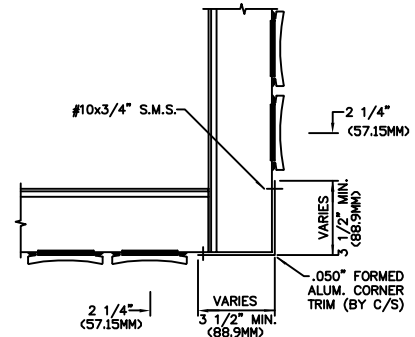

TYP. OUTSIDE CORNER DETAIL

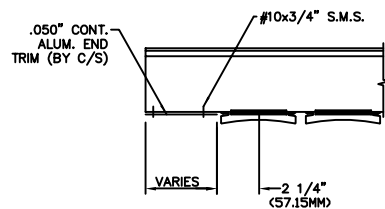

TYP. END DETAIL

GENERAL NOTES:

C/S ECONOSCREEN MODEL RF-20. BLADES ARE FABRICATED FROM 5056-H19 ALLOY, .020" THICK W/HAT-RUNNERS TO BE EXTRUDED ALUMINUM MIN. .081" THICK. V1 GRIP PLASTIC BLADE LOCKS SHALL BE SUPPLIED TO INSURE POSITIVE MECHANICAL LOCKING OF BLADES TO THE SUPPORT RUNNERS.

THIS DOCUMENT IS THE PROPERTY OF CONSTRUCTION SPECIALTIES, INC. AND CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS NOT TO BE DISCLOSED TO THIRD PARTIES AND IS NOT TO BE USED WITHOUT APPROVAL IN WRITING FROM CONSTRUCTION SPECIALTIES, INC.

Revisions				Drawn By	Job
No.	Date	By		Checked By	Contr.
				Date Approv	Arch't.
				Scale	Agent:
				Date	Sheet BF
					Drawing No.



CONSTRUCTION SPECIALTIES, INC.  
 49 MEYER AVENUE, CRANFORD, NEW JERSEY