

SJPFR & SJPFRW

TECHNICAL DATA:

Aluminum

- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221
- Sheet – 6061-T6, 3003-H14, 5005-H34, ASTM B209

Turnbar


- Material – C1075 Blue Temper Spring Steel
- Hardness - RC 44-47
- Finish - "A" Coating (Corrosion Protection)

Standard Loading

- 500 lbs.

Center Plate

- 1/8" recess to accept floor finishes

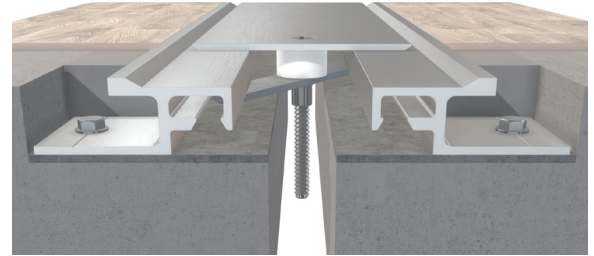

Capable of Lateral Movement

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
SJPFR-100	1.00" (25mm)	0.38" (10mm)	3.00" (76mm)	6.00" (152mm)	3.50" (89mm)	1.25" (32mm)
SJPFR-200	2.00" (51mm)	1.00" (25mm)	4.00" (102mm)	6.00" (152mm)	3.00" (76mm)	1.25" (32mm)
SJPFR-300	3.00" (76mm)	1.00" (25mm)	4.61" (117mm)	7.00" (178mm)	3.00" (76mm)	1.25" (32mm)
SJPFR-400	4.00" (102mm)	1.00" (25mm)	6.50" (165mm)	8.50" (216mm)	3.00" (76mm)	1.25" (32mm)
SJPFR-500	5.00" (127mm)	1.00" (25mm)	7.50" (191mm)	10.50" (267mm)	3.00" (76mm)	1.25" (32mm)
SJPFR-600	6.00" (152mm)	1.00" (25mm)	10.00" (254mm)	12.00" (305mm)	3.00" (76mm)	1.25" (32mm)
SJPFR-700	7.00" (178mm)	1.00" (25mm)	11.00" (279mm)	13.00" (330mm)	3.13" (80mm)	1.25" (32mm)
SJPFR-800	8.00" (203mm)	1.00" (25mm)	12.00" (305mm)	14.50" (368mm)	3.38" (86mm)	1.25" (32mm)
SJPFRW-100	1.00" (25mm)	0.00" (0mm)	2.00" (51mm)	3.50" (89mm)	3.50" (89mm)	1.25" (32mm)
SJPFRW-200	2.00" (51mm)	0.00" (0mm)	3.00" (76mm)	4.00" (102mm)	3.00" (76mm)	1.25" (32mm)
SJPFRW-300	3.00" (76mm)	0.00" (0mm)	4.00" (102mm)	5.00" (127mm)	3.00" (76mm)	1.25" (32mm)
SJPFRW-400	4.00" (102mm)	0.00" (0mm)	5.25" (133mm)	6.25" (159mm)	3.00" (76mm)	1.25" (32mm)
SJPFRW-500	5.00" (127mm)	0.00" (0mm)	6.75" (171mm)	7.75" (197mm)	3.00" (76mm)	1.25" (32mm)
SJPFRW-600	6.00" (152mm)	0.00" (0mm)	8.00" (203mm)	9.00" (229mm)	3.00" (76mm)	1.25" (32mm)
SJPFRW-700	7.00" (178mm)	0.00" (0mm)	9.00" (229mm)	10.00" (254mm)	3.13" (80mm)	1.25" (32mm)
SJPFRW-800	8.00" (203mm)	0.00" (0mm)	10.00" (254mm)	11.25" (286mm)	3.38" (86mm)	1.25" (32mm)

