

CORNER GUARD:

FINISH: _____

GAUGE: _____

TYPE: _____

CORNER GUARDS SUPPLIED IN STANDARD 16 GAUGE, TYPE #304 ALLOY WITH #4 SATIN FINISH.

OPTIONAL POWDER COAT FINISHES ARE AVAILABLE. PLEASE ADVISE OPTIONAL POWDER COAT FINISH IF REQUIRED.

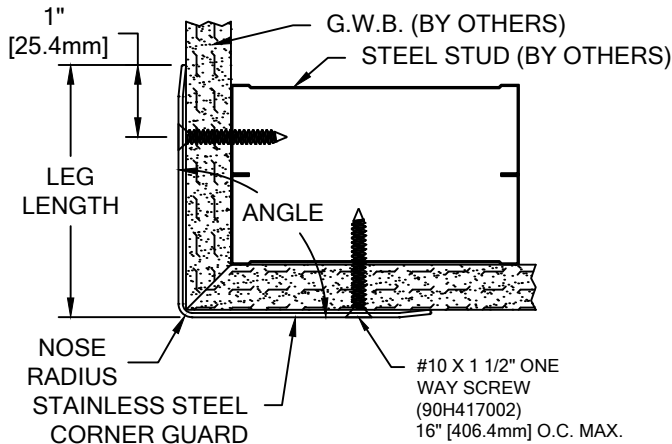
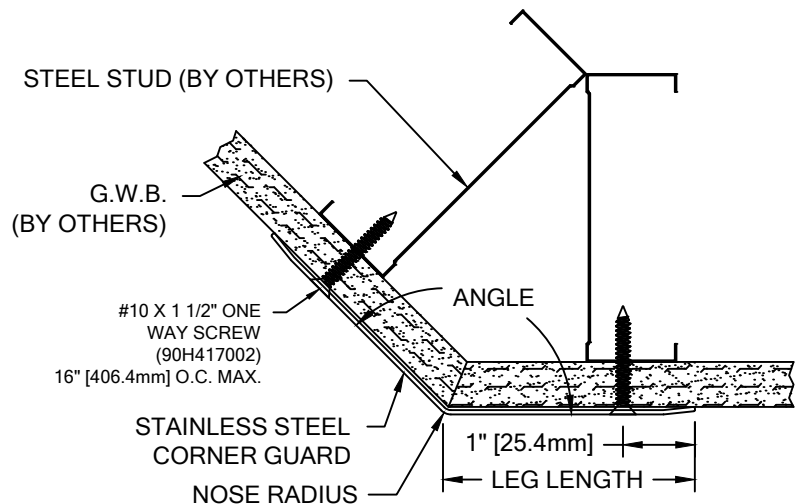
OPTIONAL GAUGE (14, 18, 20) AND ALLOY TYPES (#316, #430) AVAILABLE. PLEASE ADVISE OPTIONAL GAUGE AND ALLOY TYPE IF REQUIRED.

UNITS
REQ'DUNIT
HEIGHT

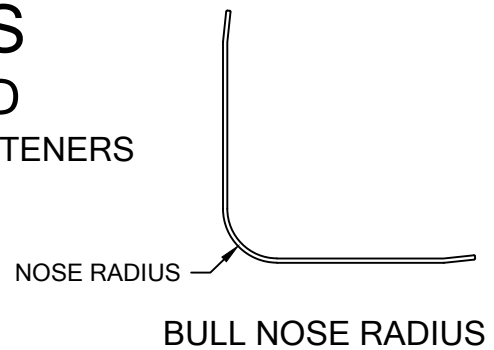
ANGLE

LEG
LENGTHNOSE
RAD.**NOTES:**

1. CORNER GUARDS ARE SHIPPED WITH A PROTECTIVE STRIPPABLE COATING.
2. CO-8 CORNER GUARDS HAVE A STANDARD ANGLE OF 90°, LEG LENGTH OF 3 1/2" [89.0mm] AND A STANDARD NOSE RADIUS OF 3/16" [4.8mm]. CO-8M CORNER GUARDS HAVE A STANDARD ANGLE OF 135°, LEG LENGTH OF 3 1/2" [89.0mm] AND A STANDARD NOSE RADIUS OF 3/16" [4.8mm]. PLEASE ADVISE IF A DIFFERENT LEG LENGTH, ANGLE OR BULL NOSE RADIUS (AVAILABLE IN 1/2" [12.7mm] AND 3/4" [19.15mm] RADIUS) IS DESIRED.
3. CORNER GUARDS HAVE A MINIMUM LEG LENGTH OF 2" [50.8mm] AND MINIMUM NOSE RADIUS OF 3/16" [4.8mm].
4. ANGLES ONLY AVAILABLE BETWEEN 45° - 178°.
5. *CORNER GUARDS CAN BE USED AT FULL OR PARTIAL HEIGHTS. PLEASE ADVISE SPECIFIED UNIT HEIGHT OF CORNER GUARD.*
6. FASTENERS ARE LOCATED 3" FROM TOP, 2-1/2" FROM BOTTOM ON 1 LEG AND 2-1/2" FROM TOP, 3" FROM BOTTOM ON OPPOSITE LEG. IF MORE THAN 2 FASTENERS ARE REQUIRED, FASTENERS WILL BE EQUALLY SPACED AT MAX 16" ON CENTER.

**MODEL: CO-8****MODEL: CO-8M**

CO-8 SERIES CORNER GUARD WITH TAMPER RESISTANT FASTENERS

**Construction Specialties**Hughesville, PA | 800.233.8493 | 570.546.5941
Mississauga, ON | 888.895.8955 | 905.274.3611
www.c-sgroup.com

© Copyright 2022 Construction Specialties, Inc.

PROJECT:**JOB NO.:****CUSTOMER:****REP:****DRAWN BY:****REVISION:****F&F:****DATE:****SHEET NO:**