
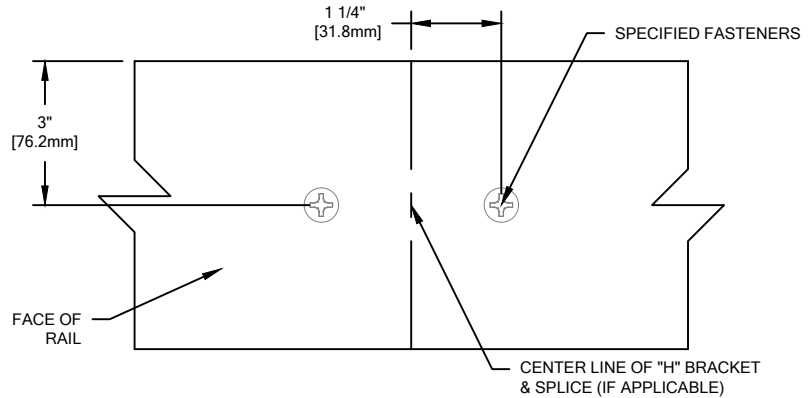


RAIL: STAINLESS STEEL RAIL 10'-1" LONG PART# 24S153000	BRACKETS: ALUMINUM HEAVY DUTY "H" BRACKET PART #: 24F195003 NO. BRACKETS REQUIRED:	BRACKETS: EXTRUSION PART #: 24A273000 NO. EXTRUSION REQUIRED:	BRACKET HARDWARE: 1/4-20 x 3/4" FLAT HEAD S/S M.S. AND HEX NUT (90H019002) (90H001001)	WALL MOUNT HARDWARE: 1/4-20 x 3" HEX HEAD BOLT w/TOGGLE & LOCK WASHER (90H281004) (90H019004) (90H009003)
QTY:	QTY:	QTY:	QTY:	QTY:

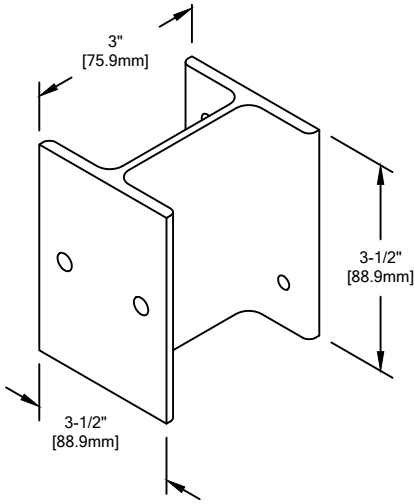


**TYPICAL ATTACHMENT**  
(SAME ATTACHMENT FOR SPLICES, IF APPLICABLE)

**CONTRACTOR NOTES:**


1. ALL DIMENSIONS MUST BE FIELD VERIFIED TO A 1/16" TOLERANCE.
2. DIMENSIONS TO BE OBTAINED AT THE ELEVATION OF MATERIAL LOCATION. ALSO, MOUNTING CONDITION TO BE VERIFIED. FABRICATION CANNOT BEGIN WITHOUT THIS INFO.
3. SOME DIMENSIONS SMALLER THAN 16" MAY BE TOO SMALL TO FABRICATE.


**NOTES:**

1. ALL RAIL TO BE SUPPLIED PREFABRICATED TO REQUIRED LENGTH. ALL CORNERS AND END CAPS TO BE FACTORY FORMED TO SUIT FIELD CONDITIONS.
2. ALL UNITS TO BE PRE-DRILLED FOR ATTACH. HOLE SPACING TO BE DETERMINED BY UNIT LENGTH, SPACING NOT TO EXCEED 32" ON CENTER.
3. ALL MOUNTING HARDWARE TO BE SUPPLIED FOR FIELD ASSEMBLY AND INSTALLATION.
4. MATERIAL:  
CS ECR-60S CRASH RAIL SHALL BE MANUFACTURED FROM A 6" WIDE X 1/4" THICK EXTRUSION (#304 STAINLESS STEEL), DESIGNED FOR ELASTIC DEFORMATION UNDER IMPACT WITHOUT DAMAGING THE WALL TO WHICH IT HAS BEEN MOUNTED
5. FINISH:  
THE ECR-60S CRASH RAIL SHALL BE FURNISHED WITH A 120 GRIT MECHANICAL #4 SATIN FINISH

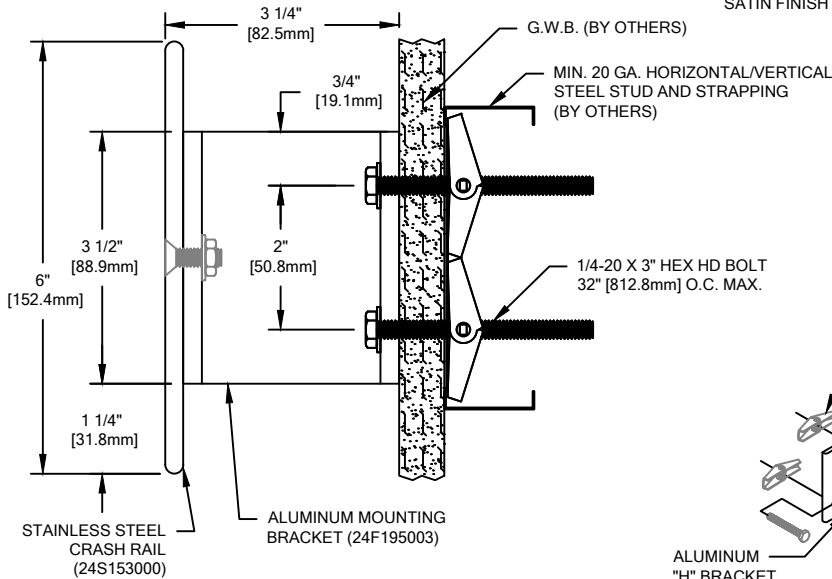

**ECR-60S  
"H" BRACKET**

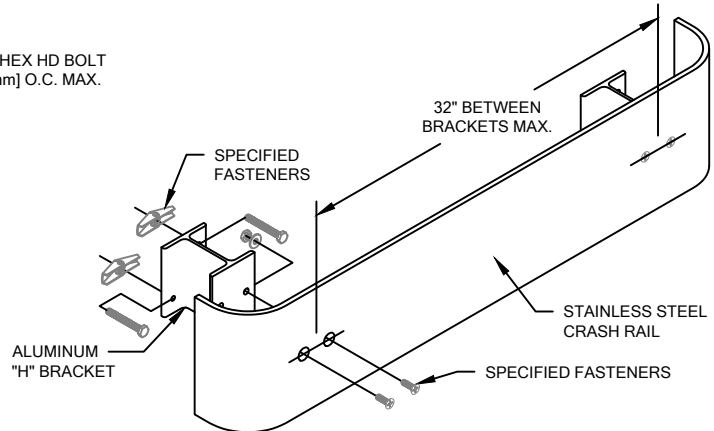

 <p>Hughesville, PA   800.233.8493   570.546.5941 Mississauga, ON   888.895.8955   905.274.3611 <a href="http://www.c-sgroup.com">www.c-sgroup.com</a></p> <p>© Copyright 2018 Construction Specialties, Inc.</p>	<b>PROJECT:</b>	<b>REVISION:</b>
	<b>JOB NO.:</b>	<b>F&amp;F:</b>
	<b>CUSTOMER:</b>	
	<b>REP:</b>	<b>DATE:</b>
	<b>DRAWN BY:</b>	<b>SHEET NO:</b>