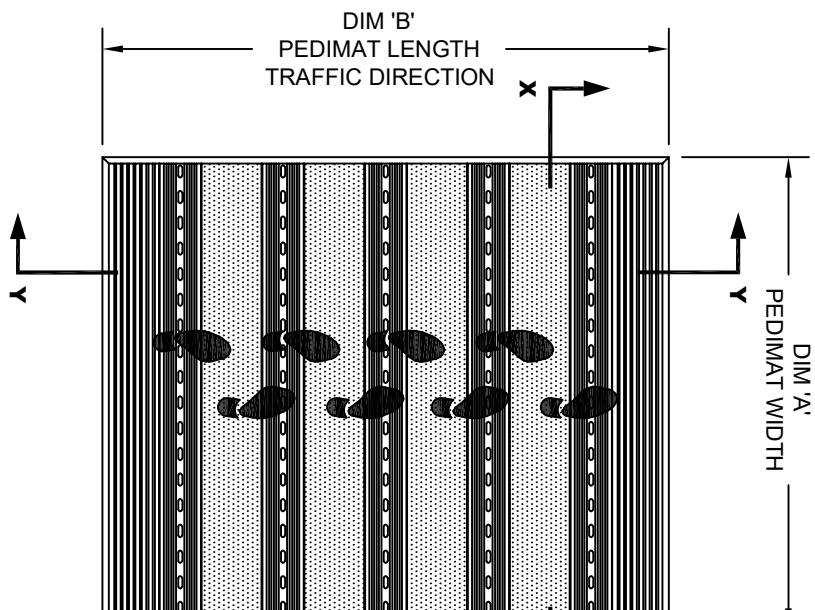


INSERT STYLE:		PEDIMAT WITH ALUMINUM TAPERED ANGLE FRAME AND DRAIN PAN		CATALOG NUMBER: M1		PART NUMBER:	
		 <p>PEDIMAT INSERT STYLES</p> <p>DIM 'A' PEDIMAT WIDTH</p> <p>DIM 'B' PEDIMAT LENGTH TRAFFIC DIRECTION</p> <p>X Y</p> <p>SQUARE END VINYL 1" (25.4mm) WIDE (17V011XXX) 2" (50.8mm) WIDE (17V012XXX)</p> <p>ALUMINUM TAPERED ANGLE FRAME (16A051XXX)</p> <p>EXTRUDED ALUMINUM CONNECTING RAIL (17A009XXX)</p> <p>CONTRACTOR INSTALLED 2" [50.8mm] GENERAL PURPOSE PVC DRAIN WITH SS STRAINER (FURNISHED BY CS)</p> <p>16GA ALUMINUM SHEET PLACED UNDER TAPERED ANGLE FRAME. CAULK SHEETS TO SUBSTRATE (BY INSTALLER)</p> <p>SECTION X-X</p> <p>SECTION Y-Y</p> <p>DIM 'A' PEDIMAT WIDTH</p> <p>DIM 'B' PEDIMAT LENGTH TRAFFIC DIRECTION</p> <p>1" [25.4mm]</p> <p>2" [50.8mm]</p> <p>1/8" [3.2mm]</p> <p>1/2" [12.7mm]</p> <p>MASONRY LAG FASTENER (90H06004) 24" (609.6mm) O.C.</p>					
NOTES:							
<p>*ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER</p> <p>*PLEASE VERIFY TRAFFIC DIRECTION</p> <p>*PEDIMAT SHALL BE ABLE TO SUPPORT A 350 LB. ROLLING LOAD. LARGER LOADING MAY BE ACCOMMODATED. CONTACT C/S SALES WITH SPECIFIC LOADING REQUIREMENTS.</p>		<p>*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A") OR 100 SQUARE FEET</p> <p>*ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-S-GROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.</p>					
<p>TYPICAL PLAN VIEW</p>							
<p>Construction Specialties™</p> <p>609A Route 605 Highway, Munro, PA 17756 (800) 233-8493 • Fax (570) 546-4622 • www.cs-group.com</p>		<p>PROJECT: _____</p> <p>LOCATION: _____</p> <p>CONTRACTOR: _____</p> <p>AGENT: _____</p> <p>DRG. BY: _____</p> <p>DATE: _____</p> <p>SHT: _____</p> <p>JOB NO.: _____</p>					
<p>PLEASE VERIFY ALL</p>							