
POWDER COATS:		TOTAL	
TOP RAIL:		TOTAL	END
BOTTOM RAIL:		L/F REQ'D	CAPS
BRACKETS:	,		
*TOP RAIL/CAPS/CORNERS/BRACKETS/BOTTOM RAIL ARE AVAILABLE WITH AN OPTIONAL POWDER COAT FINISH. PLEASE ADVISE POWDER COAT FINISH IF			
REQUIRED.			
NOTE: CTAINLESS STEEL CORNERS OTHER THAN 60°	,		

NOTE: STAINLESS STEEL CORNERS OTHER THAN 90° ARE UNAVAILABLE FOR THIS MODEL. THIS MODEL IS FABRICATED CUT-TO-SIZE, THEREFORE FIELD VERIFIED DIMENSIONS ARE REQUIRED.



WALL CONDITION	SPECIFIED FASTENER	DRILL DIAMETERS		CS PART
WALL CONDITION	SPECIFIED FASTENER	WALL	RETAINER	NUMBER
STEEL STUD/GYPUSM WALL	1/4-20 X 3" S/S FLAT HEAD BOLT WITH TOGGLE	3/4"	N/A	90H184002
CONCRETE/CONC. BLOCK	1/4" X 1 3/4" S/S FLAT HEAD MASONRY ANCHOR	3/16"	N/A	90H390000
WOOD STUD/GYPSUM WALL	#14 X 3" S/S PHILLIPS FLAT HEAD WOOD SCREW	7/32"	N/A	90H538004
16 GA. MIN STEEL STUD AND 16 GA. MIN STEEL STRAPPING / GYPSUM WALL CONSTRUCTION REQUIRED (TEK SCREWS)	#14 X 3" PHILLIPS FLAT HEAD SELF DRILLING S/S TEK SCREW	N/A	9/32"	90H230003

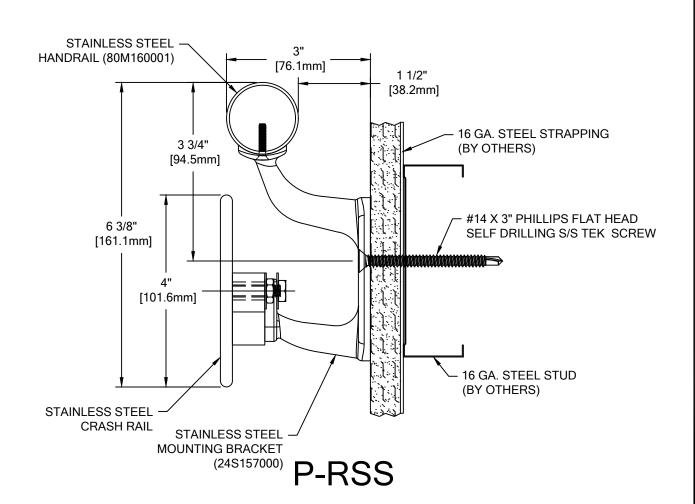

www.c-sgroup.com

© Copyright 2022 Construction Specialties, Inc.

PROJECT:	REVISION:
JOB NO.:	F&F:
CUSTOMER:	
REP:	DATE:
DRAWN BY:	SHEET NO:

O.S.

REQ'D

DOC#: TS-930-622 ISSUE DATE: 01/24/12 REV DATE: 05/15/2025