

**Model GS-607**  
**6" (152.4 mm) Standard Fixed Galvanized Steel Louver**

**Material:**

<b>Material:</b>	Galvanized Steel
<b>Nominal Thickness (heads, sills, jamps, &amp; mullions):</b>	Any combination of 16 gauge (1.52 mm), 18 gauge (1.21 mm), or 20 gauge (0.91 mm)
<b>Nominal Blade Thickness:</b>	Any combination of 16 gauge (1.52 mm), 18 gauge (1.21 mm), or 20 gauge (0.91 mm)
<b>Furnished With:</b>	Birdscreen: ½" intercrimp aluminum mesh, 0.063" diameter wire removeable aluminum bird screen in an aluminum frame
<b>Additional Options (at additional cost):</b>	Insect screen (in lieu of bird screen), Continuous clip angles for attachment Sheet blank off, Insulated blank off Sill pans, Flange frames Integrated glazing frames




**Test Summary:**  
**For a 4 Foot by 4 Foot Unit.**

*Tested with mill finish and no screen*

- Free area = 8.46 ft<sup>2</sup> (0.786 m<sup>2</sup>)
- Percent free area = 53%
- Free area velocity at the point of beginning water penetration (@ 0.01oz. / ft<sup>2</sup> of free area based on a 15 minute interval test) = 945 FPM (4.80 m/s)
- Intake pressure drop at 0.01 oz. / ft<sup>2</sup> free area velocity = 0.13 in. H<sub>2</sub>O (32.3 Pa)

**Construction Specialties Inc. certifies that the louver model GS-607 shown herein is licensed to bear the AMCA Seal.** The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.

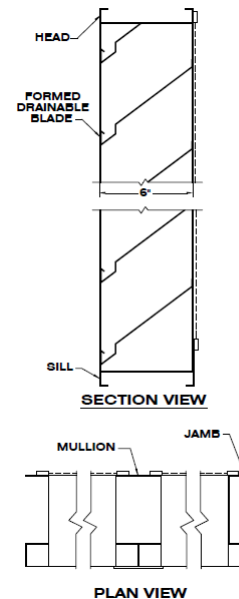


**Discharge Coefficient**  
 Intake Cd = 0.41 (Class 2)  
 AMCA certifies the coefficient class only



**Model GS-607**  
**6" (152.4 mm) Standard Fixed Galvanized Steel Louver**

**Water Penetration Statement**

AMCA defines the point of beginning water penetration as the free area velocity at which the AMCA water test has yielded 0.01 or less ounces of water per square foot of louver free area during a 15-minute test period.

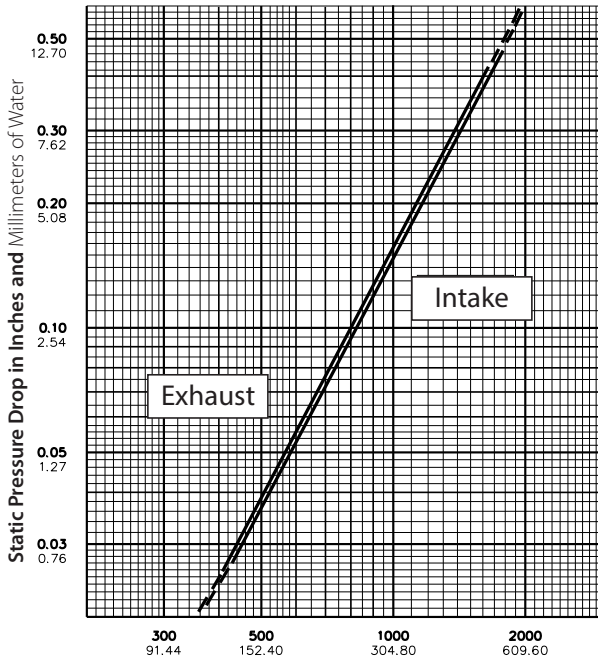

Air Velocity in Feet and Meters per Minute Through Free Area

Data corrected to standard air density.  
 48" x 48" louver tested to figure 5.5.

**Free Area Table** (Free area in sq. feet and sq. meters)

For additional sizes, please visit:

<https://www.c-sgroup.com/architectural-louvers/louvers-airflow-tool>

**Width in Inches and Meters**

	18	24	30	36	42	48	54	60
	0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52
18	0.84	1.18	1.52	1.86	2.20	2.54	2.88	3.23
0.46	0.08	0.11	0.14	0.17	0.20	0.24	0.27	0.30
24	1.12	1.57	2.02	2.48	2.93	3.38	3.84	4.29
0.61	0.10	0.15	0.19	0.23	0.27	0.31	0.36	0.40
30	1.54	2.16	2.79	3.41	4.04	4.66	5.29	5.91
0.76	0.14	0.20	0.26	0.32	0.37	0.43	0.49	0.55
36	1.97	2.77	3.58	4.38	5.18	5.98	6.79	7.59
0.91	0.18	0.26	0.33	0.41	0.48	0.56	0.63	0.70
42	2.41	3.39	4.37	5.35	6.33	7.31	8.29	9.26
1.07	0.22	0.31	0.41	0.50	0.59	0.68	0.77	0.86
48	2.85	4.01	5.18	6.34	7.50	8.66	9.82	10.98
1.22	0.27	0.37	0.48	0.59	0.70	0.79	0.91	1.02
54	3.27	4.61	5.94	7.27	8.60	9.94	11.27	12.60
1.37	0.30	0.43	0.55	0.68	0.80	0.92	1.05	1.17
60	3.71	5.22	6.73	8.24	9.75	11.26	12.77	14.28
1.52	0.34	0.48	0.63	0.77	0.91	1.05	1.19	1.33
66	4.15	5.83	7.52	9.21	10.89	12.58	14.27	15.95
1.68	0.39	0.54	0.70	0.86	1.01	1.17	1.33	1.48
72	4.58	6.45	8.31	10.17	12.04	13.90	15.77	17.63
1.83	0.43	0.60	0.77	0.95	1.12	1.29	1.46	1.64
78	4.83	6.80	8.77	10.73	12.70	14.66	16.63	18.60
1.98	0.45	0.63	0.81	1.00	1.18	1.36	1.55	1.73
84	5.29	7.44	9.59	11.74	13.89	16.04	18.19	20.34
2.13	0.49	0.69	0.89	1.09	1.29	1.49	1.69	1.89
90	5.72	8.04	10.37	12.69	15.02	17.34	19.67	21.99
2.29	0.53	0.75	0.96	1.18	1.40	1.61	1.83	2.04
96	6.13	8.62	11.11	13.61	16.10	18.59	21.09	23.58
2.44	0.57	0.80	1.03	1.26	1.50	1.73	1.96	2.19
102	6.57	9.25	11.92	14.59	17.27	19.94	22.61	25.29
2.59	0.61	0.86	1.11	1.36	1.60	1.85	2.10	2.35
108	7.02	9.87	12.73	15.58	18.44	21.29	24.15	27.00
2.74	0.65	0.92	1.18	1.45	1.71	1.98	2.24	2.51
114	7.45	10.49	13.52	16.55	19.58	22.62	25.65	28.68
2.90	0.69	0.97	1.26	1.54	1.82	2.10	2.38	2.66
120	7.89	11.10	14.31	17.52	20.73	23.94	27.15	30.36
3.05	0.73	1.03	1.33	1.63	1.93	2.22	2.52	2.82
126	8.18	11.51	14.84	18.16	21.49	24.82	28.15	31.47
3.20	0.76	1.07	1.38	1.69	2.00	2.31	2.61	2.92
132	8.59	12.08	15.58	19.07	22.56	26.06	29.55	33.04
3.35	0.80	1.12	1.45	1.77	2.10	2.42	2.75	3.07
138	9.02	12.69	16.37	20.04	23.71	27.38	31.05	34.72
3.51	0.84	1.18	1.52	1.86	2.20	2.54	2.88	3.23
144	9.46	13.31	17.16	21.00	24.85	28.70	32.55	36.40
3.66	0.88	1.24	1.59	1.95	2.31	2.67	3.02	3.38
150	9.92	13.95	17.99	22.02	26.06	30.09	34.13	38.16
3.81	0.92	1.30	1.67	2.05	2.42	2.80	3.17	3.55
156	10.32	14.52	18.72	22.91	27.11	31.31	35.51	39.71
3.96	0.96	1.35	1.74	2.13	2.52	2.91	3.30	3.69
162	10.75	15.12	19.50	23.87	28.24	32.61	36.99	41.36
4.11	1.00	1.40	1.81	2.22	2.62	3.03	3.44	3.84
168	11.20	15.75	20.31	24.86	29.42	33.97	38.53	43.08
4.27	1.04	1.46	1.89	2.31	2.73	3.16	3.58	4.00
174	11.62	16.35	21.08	25.80	30.53	35.26	39.99	44.71
4.42	1.08	1.52	1.96	2.40	2.84	3.28	3.71	4.15
180	11.90	16.74	21.58	26.42	31.26	36.10	40.94	45.78
4.57	1.11	1.56	2.00	2.45	2.90	3.35	3.80	4.25
186	12.33	17.35	22.36	27.38	32.40	37.41	42.43	47.45
4.72	1.15	1.61	2.08	2.54	3.01	3.48	3.94	4.41
192	12.77	17.96	23.16	28.35	33.54	38.74	43.93	49.12
4.88	1.19	1.67	2.15	2.63	3.12	3.60	4.08	4.56
198	13.19	18.56	23.93	29.29	34.66	40.03	45.39	50.76
5.03	1.23	1.72	2.22	2.72	3.22	3.72	4.22	4.72

Upper Numerals English Units/Lower Numerals Metric Units