

FR-451N

This 4 1/2" high Acrovyn accent rail can be installed separately or with the Saratoga® Wall System.

Product Data

Technical Data:

- 4 1/2" (116.3mm) height
- 1" (24.8mm) wall offset
- .040" (1.02mm) thick Acrovyn sheet formed over MDF
- Maximum 9' 6" (2.9m) length

Features:

- UL Class B/2 fire rated
- Suede texture Acrovyn
- Engineered PETG free of PVC and PBTs
- 5 year product warranty
- Chameleon™ limited lifetime warranty

Options:


- Field mitered ends and inside/outside corners

Similar Models:

- FRW-451 - Acrovyn 4 1/2" (114.3mm) height; 1" (23.8mm) wall offset
- FR-251N - Acrovyn 2 1/2" (63.5mm) height; 3/4" (18.9mm) wall offset
- FR-252N - Acrovyn 2 1/2" (63.5mm) height; 3/4" (19.0mm) wall offset
- FR-253N - Acrovyn 2 1/2" (63.5mm) height; 3/4" (18.9mm) wall offset
- FR-260N - Acrovyn 2 1/4" (57.1mm) height; 1" (25.4mm) wall offset



Solid Colors | Chameleon Patterns

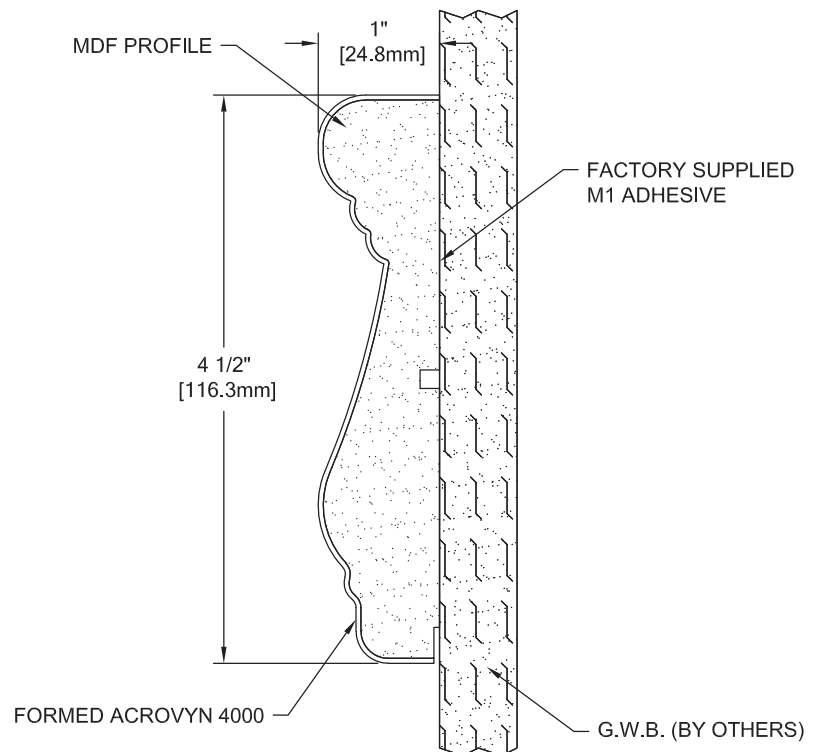

SUGGESTED SPECIFICATIONS
SECTION 10 26 00
CS Acrovyn 4000 Model FR-451N

Part 1 - General

1.01 Summary

A. This section includes the following types of wall protection systems:

1. Accent Rails

B. Related sections: The following sections contain requirements related to this section:

1. Handrails, Corner Guards, Bumper Guards, Crash Rails, Wall Coverings, Wall Panels, Door Protection; refer to section 10 26 00 "Wall and Door Protection"

1.02 References

A. National codes (IBC, UBC, SBCCI, BOCA and Life Safety)

B. American Society for Testing and Materials (ASTM)

C. Underwriters Laboratories (UL)

1.03 Submittals

General: Submit the following in accordance with conditions of contract and Division 1 specification section 01 33 00 "Submittal Procedures":

A. Product data and detailed specifications for each system component and installation accessory required, including installation methods for each type of substrate.

B. Shop drawings showing locations, extent and installation details of accent rails. Show methods of attachment to adjoining construction.

C. Samples for verification purposes: Submit the following samples, as proposed for this work, for verification of color, texture and pattern:

1. 12" (304.8mm) long sample of each model specified.

D. Product test reports from a qualified independent testing laboratory showing compliance of each component with requirements indicated.

E. Maintenance data for wall protection system components for inclusion in the operating and maintenance manuals specified in Division 1.

1.04 Quality Assurance

A. Installer qualifications: Engage an installer who has no less than 3 years experience in installation of systems similar in complexity to those required for this project.

B. Manufacturer's qualifications: Not less than 5 years experience in the production of specified products and a record of successful in-service performance.

C. Code compliance: Assemblies should conform to all applicable codes including IBC, UBC, SBCCI, BOCA and Life Safety.

D. Fire performance characteristics: Provide engineered PETG wall protection system assembled from components that are identical to those tested in accordance with ASTM E84 for Class B/2 characteristics listed below:

1. Flame spread: 75 or less

2. Smoke developed: 450 or less

E. Chemical and stain resistance: Provide wall protection system components with chemical and stain resistance in accordance with ASTM D543.

F. Color match: Provide wall protection components that are color matched in accordance with the following:

1. Delta Ecmc of no greater than 1.0 using CIE Lab color space. (Specifier note: Construction

Specialties' colors are matched under cool white fluorescent lighting and computer controlled within manufacturing tolerances. Color may vary if alternate lighting sources are present.)

G. Single source responsibility: Provide all components of the wall protection system manufactured by the same company to ensure compatibility of color, texture and physical properties.

1.05 Delivery, Storage and Handling

A. Deliver materials to the project site in unopened original factory packaging clearly labeled to show manufacturer.

B. Store materials in original, undamaged packaging in a clean, dry place out of direct sunlight and exposure to the elements. A minimum room temperature of 40°F (4°C) and a maximum of 100°F (38°C) should be maintained.

C. Materials must be stored flat.

1.06 Project Conditions

A. Materials must be acclimated in an environment of 65-75°F (18-24°C) for at least 24 hours prior to beginning the installation.

B. Installation areas must be enclosed and weatherproofed before installation commences.

Part 2 - Products

2.01 Manufacturers

A. Interior surface protection products specified herein and included on the submittal drawings shall be manufactured by Construction Specialties, Inc.

2.02 Materials

A. Engineered PETG: High-impact Acrovyn 4000 sheet with Suede texture, nominal .040" (1.02mm) thickness. Chemical and stain resistance should be per ASTM D543 standards as established by the manufacturer. Colors to be indicated in the finish schedule from one of manufacturer's available colors and patterns.

B. Medium Density Fiber (MDF): 3/4" (19.05mm) board material with no added urea formaldehyde.

2.03 Accent Rails

A. Engineered PETG Accent Rails to be CS Acrovyn: Surface mounted assembly consisting of Acrovyn 4000 sheet formed over shaped MDF board.

1. Model FR-451N 4 1/2" (116.3mm) high engineered PETG accent rail. Select from one of Acrovyn solid colors or Chameleon™ simulated patterns.

2.04 Fabrication

A. General: Fabricate wall protection systems to comply with requirements indicated for design, dimensions, detail, finish and sizes.

2.05 Accessories

A. Adhesive: Acrovyn wall protection shall be furnished as a complete packaged system, including appropriate standard adhesive.

Part 3 - Execution

3.01 Examination

A. Verification of conditions: Examine areas and conditions under which work is to be performed and identify conditions detrimental to proper or timely completion.

1. Do not proceed until unsatisfactory conditions have been corrected.

3.02 Preparation

A. Surface preparation: Prior to installation, clean substrate to remove dirt, debris and loose particles. Perform additional preparation procedures as required by manufacturer's instructions.

B. Protection: Take all necessary steps to prevent damage to material during installation as required in manufacturer's installation instructions.

3.03 Installation

A. Install the work of this section in strict accordance with the manufacturer's recommendations, using only approved adhesive and locating all components firmly into position, level and plumb.

B. Temperature at the time of installation must be between 65-75°F (18-24°C) and be maintained for at least 48 hours after the installation.

3.04 Cleaning

A. General: Immediately upon completion of installation, clean rails and accessories in accordance with manufacturer's recommended cleaning method.

B. Remove surplus materials, rubbish and debris resulting from installation as work progresses and upon completion of work.

3.05 Protection

A. Protect installed materials to prevent damage by other trades. Use materials that may be easily removed without leaving residue or permanent stains.