

RFC & RFWC

TECHNICAL DATA:

Aluminum


- Extrusion – CS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221
- Sheet – 6061-T6, 3003-H14, 5005-H34, ASTM B209

Turnbar

- Material – Injection molded, glass-reinforced plastic

Standard Loading

- 500 lbs.

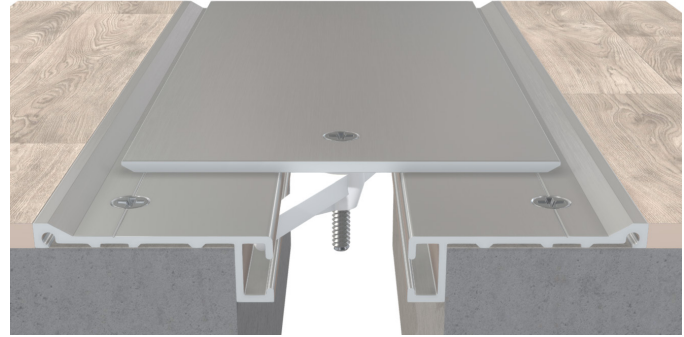

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
RFC-200	2.00" (51mm)	1.25" (32mm)	4.88" (124mm)	5.75" (146mm)	N/A	N/A
RFC-300	3.00" (76mm)	1.25" (32mm)	5.75" (146mm)	6.75" (171mm)	N/A	N/A
RFC-400	4.00" (102mm)	1.25" (32mm)	6.50" (165mm)	7.75" (197mm)	N/A	N/A
RFWC-200	2.00" (51mm)	0.38" (10mm)	3.44" (87mm)	3.88" (99mm)	N/A	N/A
RFWC-300	3.00" (76mm)	0.38" (10mm)	4.44" (113mm)	4.88" (124mm)	N/A	N/A
RFWC-400	4.00" (102mm)	0.38" (10mm)	5.44" (138mm)	5.88" (149mm)	N/A	N/A

