HB


TECHNICAL DATA:

Seal

- Material EPDM
- Color Black
- Durometer 74 Shore A, ASTM D2240

Ероху

- 2 part
- Gel Time 35 minutes, ASTM C881
- Bond Strength (2 day cure) 2,232 psi, ASTM C882
- Bond Strength (14 day cure) 2,460 psi, ASTM C880
- Compressive Modulus 250,100 psi, ASTM D695

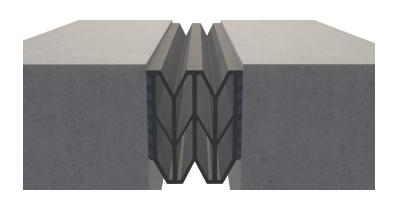

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT	SEAL DEPTH
HB-100	1.00" (25mm)	0.50" (13mm)	1.50" (38mm)	1.00" (25mm)	N/A	N/A	2.25" (57mm)
HB-200	2.00" (51mm)	1.00" (25mm)	3.00" (76mm)	2.00" (51mm)	N/A	N/A	2.50" (64mm)
HB-300	3.00" (76mm)	1.50" (38mm)	4.50" (114mm)	3.00" (76mm)	N/A	N/A	2.50" (64mm)
HB-400	4.00" (102mm)	2.00" (51mm)	6.00" (152mm)	4.00" (102mm)	N/A	N/A	3.50" (89mm)

